



Rustfrit stål - Rostfreier Stahl Rostfritt stål - Stainless steel

DK Spændebånd

Bånd: Rustfrit stål, bredde 12,7 mm, perforeret, (DIN 1.4310/AISI 301).
Hus: Rustfrit stål, (DIN 1.4310/AISI 301).
Skrue: Rustfrit stål, sekskantet med kærøv 5/16"/8 mm, (DIN 1.4303/AISI 305).
Tilspændingsmoment: Rekommanderet 4,5 Nm, 40 in-lbs

D Schlauchschellen



Band: Rostfreier Stahl, Breite 12,7 mm, perforiert, (DIN 1.4310/AISI 301).
Gehäuse: Rostfreier Stahl, (DIN 1.4310/AISI 301).
Schraube: Rostfreie Sechskant-Schraube mit Kerbe 5/16"/8 mm, (DIN 1.4303/AISI 305).
Anziehmoment: Richtwert 4,5 Nm, 40 in-lbs

S Slangklammer

Band: Rostfritt stål, bredd 12,7 mm, perforerat, (DIN 1.4310/AISI 301).
Hus: Rostfritt stål, (DIN 1.4310/AISI 301).
Skruv: Rostfritt stål, sekskant 5/16"/8 mm med spår, (DIN 1.4303/AISI 305).
Åtdragningsmoment: Rekommanderat 4,5 Nm, 40 in-lbs

GB Gear clamps

Band: Stainless steel, width 12,7 mm, perforated, (DIN 1.4310/AISI 301).
House: Stainless steel, (DIN 1.4310/AISI 301).
Screw: Stainless steel, 5/16"/8 mm slotted hexagon, (DIN 1.4303/AISI 305).
Torque: Recommended 4,5 Nm, 40 in-lbs



| min. | Ø (mm) max. | Triscan ref.: | XXX | XXX |
|------|----------------|---------------|----------|----------|
| | | | = 706 | = 106 |
| | | | stk./pcs | stk./pcs |
| 10 | 22 | 2620 006 xxx | 10 | 500 |
| 11 | 25 | 2620 008 xxx | 10 | 500 |
| 14 | 27 | 2620 010 xxx | 10 | 500 |
| 14 | 32 | 2620 012 xxx | 10 | 500 |
| 18 | 38 | 2620 016 xxx | 10 | 500 |
| 19 | 44 | 2620 020 xxx | 10 | 500 |
| 27 | 51 | 2620 024 xxx | 10 | 500 |
| 33 | 57 | 2620 028 xxx | 10 | 500 |
| 40 | 64 | 2620 032 xxx | 10 | 400 |
| 19 | 70 | 2620 036 xxx | 10 | 400 |
| 26 | 76 | 2620 040 xxx | 10 | 400 |
| 32 | 82 | 2620 044 xxx | 10 | 400 |
| 38 | 89 | 2620 048 xxx | 10 | 300 |
| 44 | 95 | 2620 052 xxx | 10 | 300 |
| 51 | 101 | 2620 056 xxx | 10 | 300 |
| 57 | 108 | 2620 060 xxx | 10 | 200 |
| 64 | 114 | 2620 064 xxx | 10 | 200 |
| 76 | 127 | 2620 072 xxx | 10 | 200 |
| 95 | 146 | 2620 084 xxx | 10 | 200 |
| 102 | 152 | 2620 088 xxx | 10 | 200 |
| 114 | 165 | 2620 096 xxx | 10 | 100 |
| 127 | 178 | 2620 104 xxx | 10 | 100 |
| 165 | 216 | 2620 128 xxx | | 100 |
| 51 | 254 | 2620 152 xxx | | 100 |
| 242 | 292 | 2620 176 xxx | | 100 |
| 52 | 311 | 2620 188 xxx | | 100 |
| 298 | 349 | 2620 212 xxx | | 100 |
| 337 | 387 | 2620 236 xxx | | 100 |

DK

xxx = emballagekode:
- **706** = æske á 10 stk.
- **106** = pakket i karton

D


xxx = Verpackungsnummer:
- **706** = Schachtel á 10 Stück
- **106** = Kartonverpackung

S

xxx = förpackningskod:
- **706** = ask med 10 st
- **106** = förpackad i kartong

GB

xxx = packaging code:
- **706** = 10-pc-box
- **106** = cartoned

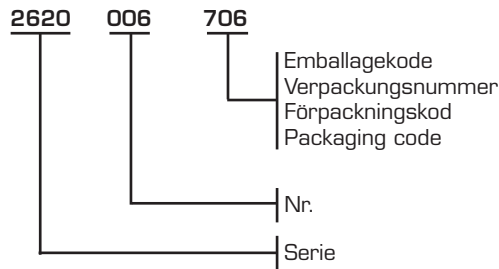

- 106



-706



>address

Triscan a/s
Engmarken 11
DK-8220 Brabrand
Denmark

>contact

Phone +45 8622 5811
Fax +45 8622 5877

>contact

email auto@triscan.dk
www.triscan.com